

CAREEL



FEATURES

- Built in foam flotation.
- Woven rovings used in hull.
- Excellent non skid deck surface.
- Full length bunks, glassed in to form box girder for extra strength.
- Drained petrol storage.
- Drained anchor storage.
- Insulated, drained ice box.
- Large cockpit self drainers.
- Safety toe rail.
- Worm drive winch for keel uphaul, cockpit operated or hydraulic ram operated from cockpit.
- Hydrodynamically shaped swing up rudder with locking down line and lifting tiller.
- Sliding cabin hatch.
- Lock-up forward hatch.
- Stainless steel pulpit.
- Stainless steel pushpit and sheet traveller.
- Teak or stainless steel hand rails. Solid teak mast post.
- Life rails.
- Padded back rest and storage shelves.
- Carpet on cabin floor.
- Anodised aluminium mast and boom.
- Jiffy reefing.
- Mainsail and jib plus sailbag.
- Protective vinyl gunnels.
- Boarding step.
- Shaped 186kg cast iron swing keel, zinc sprayed with lock down.
- Galvanised steel tilt trailer with brakes and jockey wheel.
- Anchor chain and rope.
- Hi field levers fitted.
- Jib furler.
- Cleanable water tanks, pump and sliding sink.
- 2 burner methylated spirit stove.
- Fluorescent cabin light, including batteries.
- Portable toilet.
- Navigation light.
- Front Runner cabin liner.

● All Careel Yachts since 1990 are built using the revolutionary Anti-osmosis range of Fero Gelcoats. Silicone impregnated, these enable the yacht to be left in the water for weeks at a time leaving only an easily removed slimy residue.

For yachts being left in the water permanently a new copper impregnated gelcoat is available which eliminates the need to antifoul for up to 10 years.

DAVID ROSE YACHTS



PTY. LTD.

A.C.N. 000 809 370

14 Currawong Avenue, Palm Beach, 2108 NSW Australia

Telephone: (02) 974 4701 Fax: (02) 974 5669

MEMBER OF BOATING INDUSTRY ASSOCIATION OF AUSTRALIA

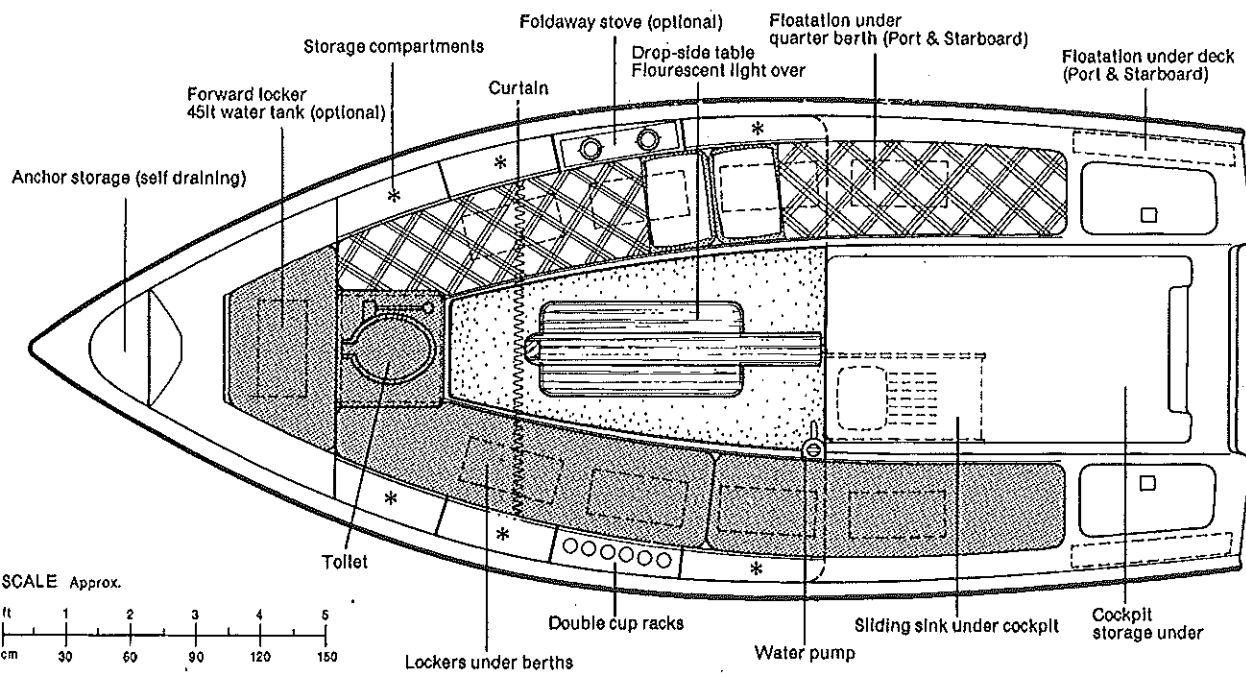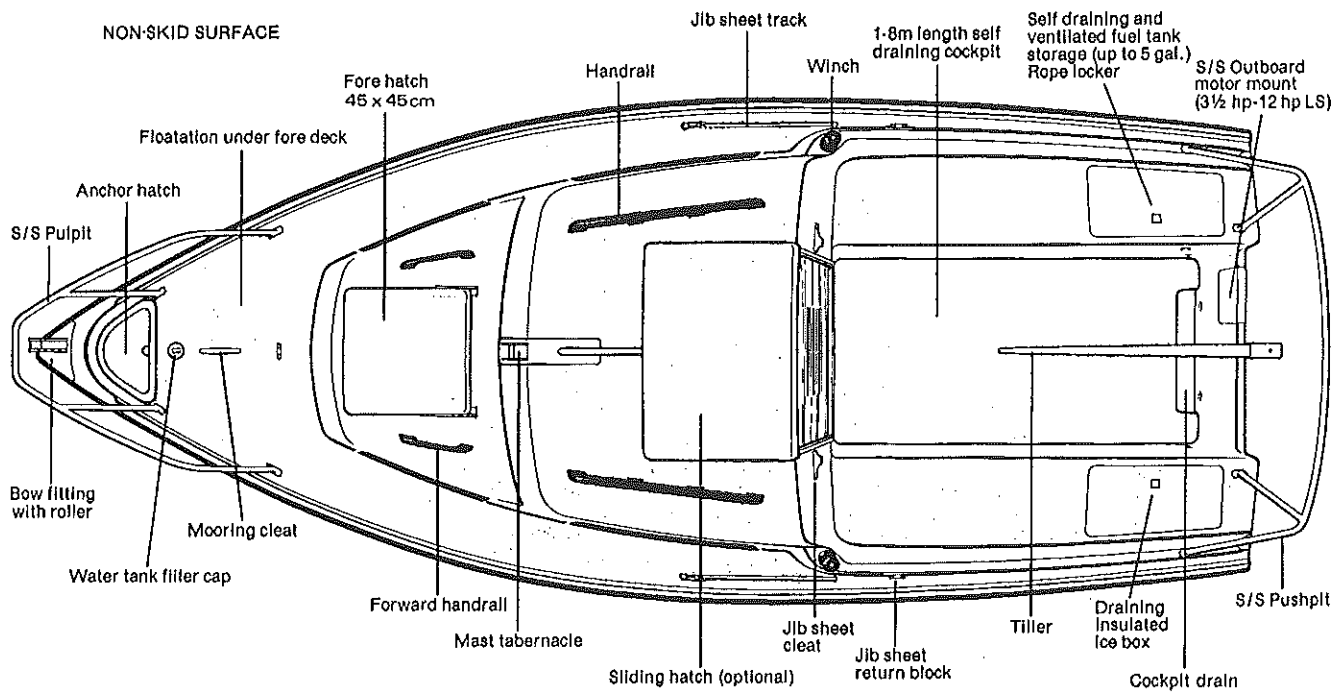

MORE FEATURES FOR YOU AND YOUR FAMILY'S SAFETY:

- Full polyurethane foam buoyancy
- Locking down line on keel
- Drained petrol storage, completely separate from rest of the yacht


- Excellent non-skid surface
- Roller reefing on boom
- Stainless steel safety pushpit - makes it easy to pull yourself on board, stops you falling backwards overboard, something to brace yourself against when attending to the

- outboard motor, also doubles as a mainsheet traveller to keep gear out of cockpit.
- Raised toe rail, right around boat to brace your foot against and to stop gear from sliding overboard.



MORE FEATURES FOR YOUR CONVENIENCE AND COMFORT

- Fourteen feet of bunk space either side - room for four adults or two adults and three small children.
- Drained anchor hatch.
- Stainless steel bow fitting, incorporating bow roller and deck cleat for easy anchoring and mooring.
- Solid teak gunwales, easily maintained.
- Solid teak handrails.
- Lockable forward hatch, safely off the deck - also a wonderful safe lookout spot for small children to stand.
- Insulated ice box right near the helm, self draining.
- Two Barlow sheet winches - separate handles are available.
- Stainless steel outboard mount on transom
- Lockable cabin door louvred for ventilation.
- Solid Teak mast post in satin finish.
- Solid Teak dropside table.
- Ample storage under bunks.
- Provision for folding stove - which is removable to cook out on deck if you wish.
- Sliding sink, water tanks and pump as optional extras - sliding out of sight under the cockpit when not in use and not taking up precious bunk space.
- Easy care carpet on cabin floor.
- Sun awning available to keep cockpit and cabin cool.
- Teak panelling to give a warm and luxurious look to the cabin and also providing for storage for cups, plates etc. and also providing a comfortable back rest.
- The toilet area is ventilated by the forward hatch and curtained for privacy.

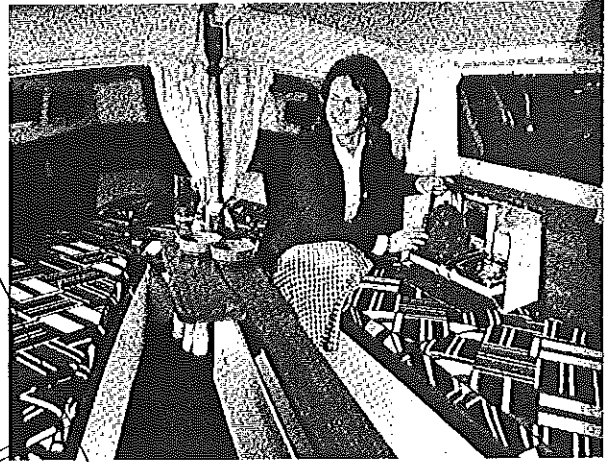

SPECIFICATIONS

Length:	5.5m (18'5")	Beam	2.26m (7'5")		
Draft:	.30m (12")	Keel up	1.2m (4')	Keel down	
Displacement:	544 kg (1200 lbs)				
Keel Weight:	99.80 kg (220 lbs)				
Internal Ballast:	45 kg (100 lbs)				
Mast Height:	7m (23') above coach house				
Sail Area:	Mainsail 12.4 sq.m (134 sq.ft.)				
	Jib 7.5 sq.m (81 sq.ft.)				
	Genoa 10.08 sq.m. (112 sq.ft.)				
	Storm Jib 2.52 sq.m (28 sq.ft.)				
Construction:	Maintenance free fibreglass, to the highest specifications.				

